



- NOTES:
 1. MAX. MTG. TORQUE = 3lb-in.
 2. HARDWARE IS INCLUDED.

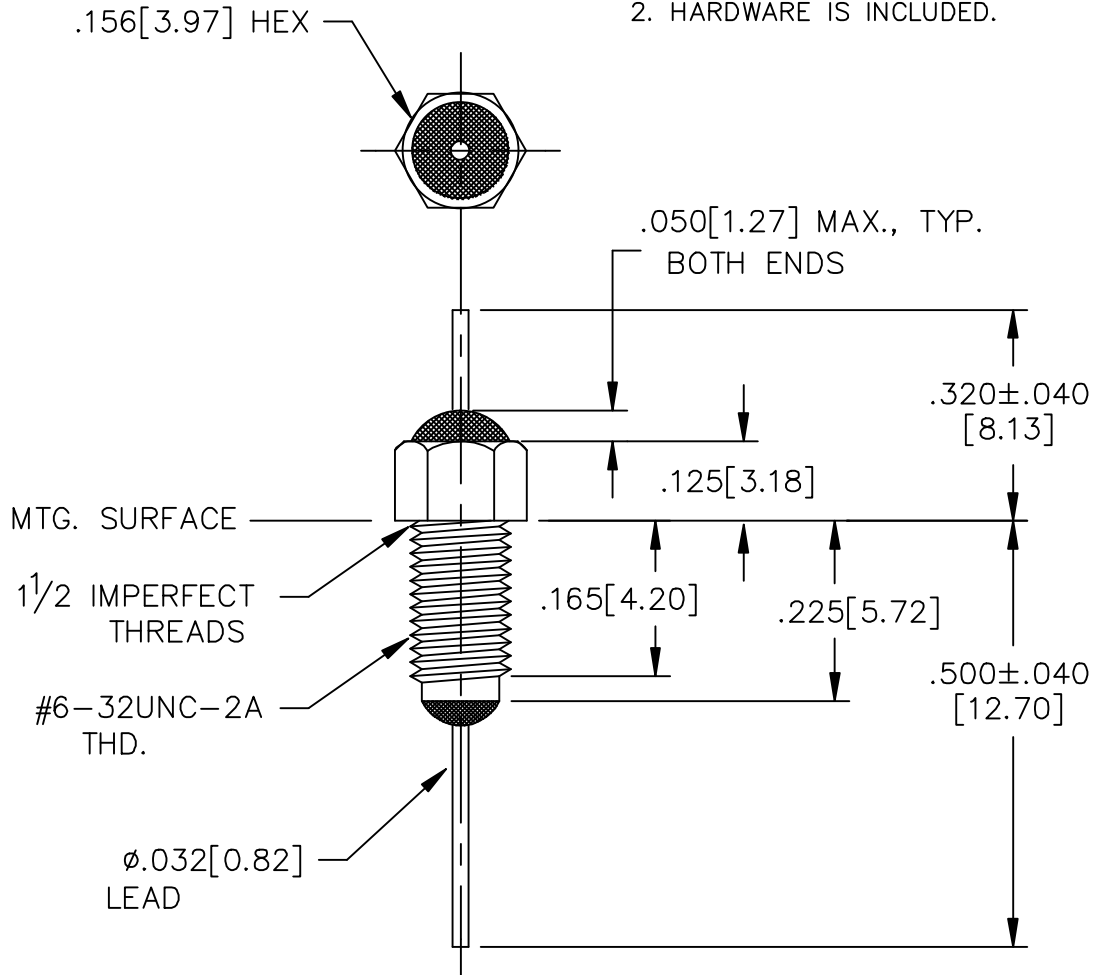

LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	1000pF +100/-0%
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C -- VDC MAX. 125°C 100 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	N/A
100	N/A
500	N/A
1 GHz	N/A
10 GHz	N/A

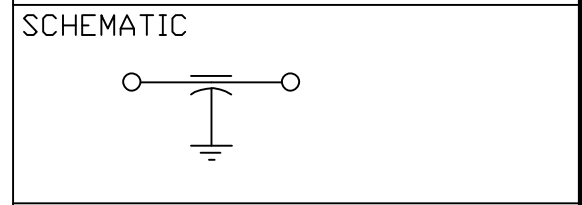

MARKING:
 PART: SF 102P
 BAG:
 SCIF 779-072
 DATE CODE
 QTY/BAG (200 MAX.)

	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED		FAIRVIEW PENNSYLVANIA
	CR #273	CHANGE NOTICE	Fractions ± 1/64 Dec. .xx± Dec. .xxx±.005 Angles ±0° 30'		
			CODE IDENT. NO. QLSP2	Engr. B. DEVINE Scale NONE	54F-779-072