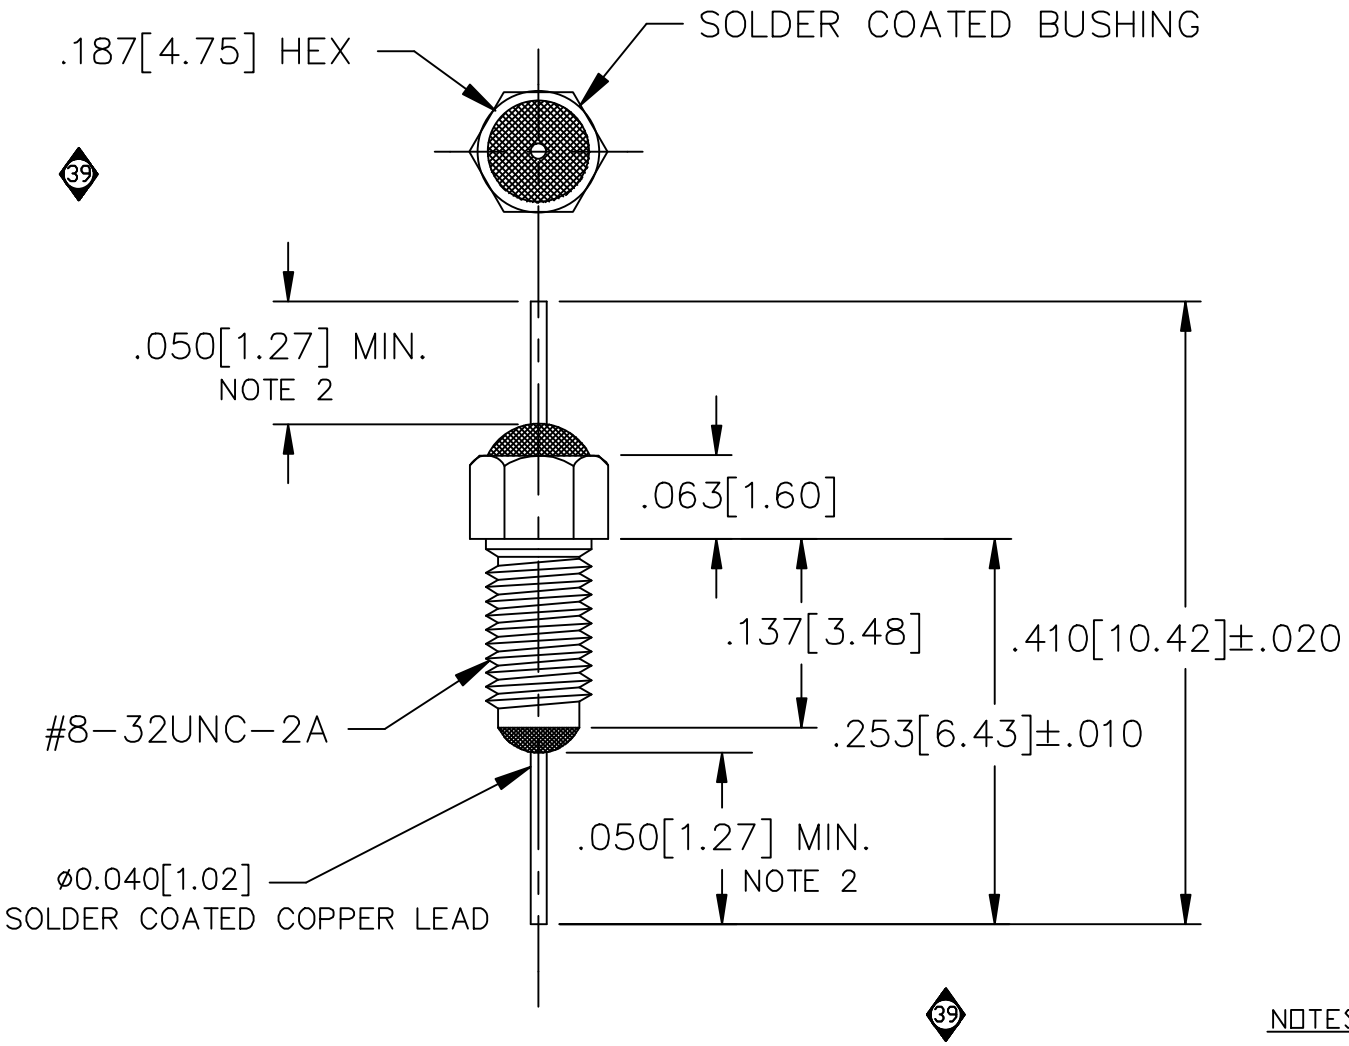

CAPACITANCE	1500pF GMV
TEMP. RANGE	-55°C TO +125°C
CURRENT	15 AMP MAX.
WORKING VOLTAGE	125°C 85 VAC 125°C 125 VDC
DC RESISTANCE	.01 Ohms MAX.
I.L.=25°C, NO LOAD	
4MHz	3dB
100MHz	20dB
500MHz	40dB
1GHz	50dB
10GHz	50dB
SCHEMATIC	

MARKING:

PART: M15733/44-0002 (4PT.)
BAG:
MIL 15733/44-0002
OLSP2
DATE CODE
125VDC 85VAC
125°C
10A
QTY/BAG (100 MAX.)
P.O. NO.

NOTE: PACKAGE MARKED SAME AS BAG.

NOTES:

1. HARDWARE IS INCLUDED.
2. SOLDERABLE AREA.

REV. NO.	CHANGE NOTICE
39	CN #6567
38	CN 211855
37	CN 184944

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx±
Dec. .xxx± .010
Angles ±0° 30'

CODE IDENT. NO.
OLSP2

api technologies corp.
FAIRVIEW PENNSYLVANIA

Dwn. KAUFFMAN
Date 11-05-14
Engr. B.DEVINE
Scale NONE

Description
Pi FILTER

51-762-005