

# CKCM25JB1H102M060AA

TDK Item Description : CKCM25JB1H102MT\*\*\*\*



## Application & Main Feature

Commercial Grade ( 2 in 1 Array )

## Series

CKCM25



## Dimensions

L	1.37mm +/-0.15mm
W	1.00mm +/-0.15mm
T	0.60mm +/-0.1mm
C	0.36mm Nom.
P	0.64mm Nom.

## Temperature Characteristic

JB (-25 to 85 degC +/-10%)

## Rated Voltage

1H (50Vdc)

## Capacitance

1nF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

2.5% Max.


## Insulation Resistance

10Gohm Min.


## AEC-Q200

Not Applicable


## |Z|, ESR vs. Freq. Characteristics

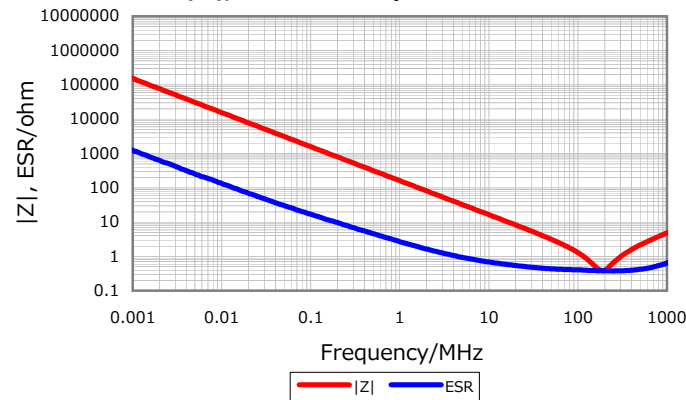


## Cap. vs. Freq. Characteristic

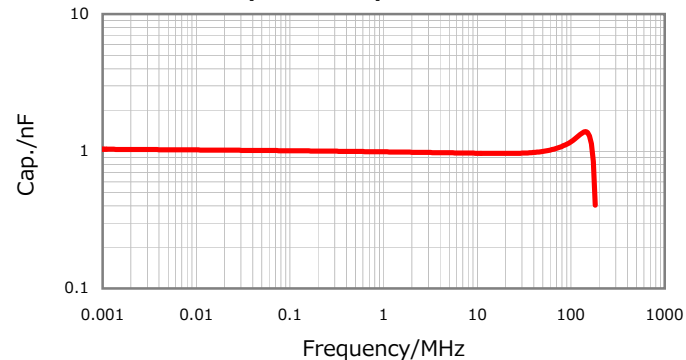

## DC Bias Characteristic

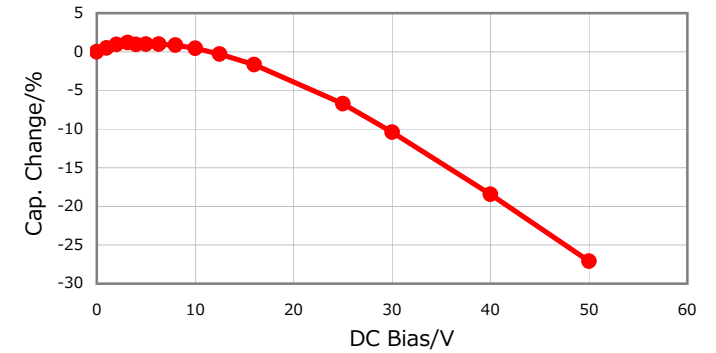

## Temperature Characteristics

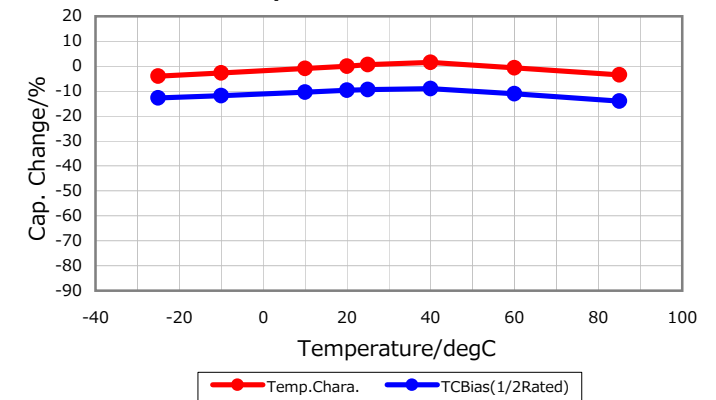

## Ripple Temperature Rise Characteristics

