

International
IR Rectifier

100BGQ045
 100BGQ045J

SCHOTTKY RECTIFIER

100 Amp

Major Ratings and Characteristics

| Characteristics | 100BGQ045 | Units |
|----------------------------------|------------|-------|
| $I_{F(AV)}$ Rectangular waveform | 100 | A |
| @ T_C | 100 | °C |
| I_{DC} Maximum | 141 | A |
| V_{RRM} | 45 | V |
| I_{FSM} @ $t_p=5\mu s$ sine | 4400 | A |
| V_F @100Apk typical | 0.63 | V |
| @ T_J | 150 | °C |
| T_J range | -55 to 150 | °C |

Description/ Features

The 100BGQ045 Schottky rectifier has been optimized for ultra low forward voltage drop specifically for low voltage output in high current AC/DC power supplies.

The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 150°C T_J operation
- High Frequency Operation
- Ultra low forward voltage drop
- Continuous High Current operation
- Guard ring for enhanced ruggedness and long term reliability
- **PowIRtab™ package**

Case Styles

100BGQ045



100BGQ045J



Voltage Ratings

| Part number | 100BGQ045 |
|---|-----------|
| V_R Max. DC Reverse Voltage (V) | 45 |
| V_{RWM} Max. Working Peak Reverse Voltage (V) | |

Absolute Maximum Ratings

| Parameters | 100BGQ | Units | Conditions |
|--|--------|-------|--|
| $I_{F(AV)}$ Max. Average Forward Current | 100 | A | 50% duty cycle @ $T_C = 100^\circ\text{C}$, rectangular wave form |
| $I_{F(RMS)}$ RMS Forward Current | 141 | A | $T_C = 95^\circ\text{C}$ |
| I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current | 4400 | A | 5 μs Sine or 3 μs Rect. pulse |
| | 830 | | 10ms Sine or 6ms Rect. pulse |
| E_{AS} Non-Repetitive Avalanche Energy | 40 | mJ | $T_J = 25^\circ\text{C}$, $I_{AS} = 6$ Amps, $L = 2.0$ mH |
| I_{AR} Repetitive Avalanche Current | 6 | A | Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical |

Electrical Specifications

| Parameters | 100BGQ | | Units | Conditions | |
|---------------------------------------|--------|------|------------------|---|---------------------------|
| | Typ. | Max. | | | |
| V_{FM} Forward Voltage Drop (1) (2) | 0.52 | 0.56 | V | @ 50A | $T_J = 25^\circ\text{C}$ |
| | 0.67 | 0.73 | V | @ 100A | |
| | 0.47 | 0.52 | V | @ 50A | $T_J = 150^\circ\text{C}$ |
| | 0.63 | 0.68 | V | @ 100A | |
| I_{RM} Reverse Leakage Current (1) | 0.3 | 1 | mA | $T_J = 25^\circ\text{C}$ | $V_R = \text{rated } V_R$ |
| | 180 | 320 | mA | $T_J = 125^\circ\text{C}$ | |
| | 600 | 1000 | mA | $T_J = 150^\circ\text{C}$ | |
| $V_{F(TO)}$ Threshold Voltage | 0.379 | | V | $T_J = T_J$ max. | |
| r_t Forward Slope Resistance | 2.7 | | m Ω | | |
| C_T Max. Junction Capacitance | 2700 | | pF | $V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C | |
| L_S Typical Series Inductance | 3.5 | | nH | Measured from tab to mounting plane | |
| dv/dt Max. Voltage Rate of Change | 10000 | | V/ μs | (Rated V_R) | |

(1) Pulse Width < 300 μs , Duty Cycle < 2%(2) $V_{FM} = V_{F(TO)} + r_t \times I_F$

Thermal-Mechanical Specifications

| Parameters | 100BGQ | Units | Conditions |
|---|------------|--------------------|--------------------------------------|
| T_J Max. Junction Temperature Range | -55 to 150 | $^\circ\text{C}$ | |
| T_{stg} Max. Storage Temperature Range | -55 to 150 | $^\circ\text{C}$ | |
| R_{thJC} Max. Thermal Resistance Junction to Case | 0.50 | $^\circ\text{C/W}$ | DC operation |
| R_{thCS} Typical Thermal Resistance, Case to Heatsink | 0.20 | $^\circ\text{C/W}$ | Mounting surface, smooth and greased |
| wt Approximate Weight | 5(0.18) | g(oz.) | |
| T Mounting Torque | Min. | 1.2(10) | N*m (lbf-in) |
| | Max. | 2.4(20) | |
| Case Style | PowIRtab™ | | |

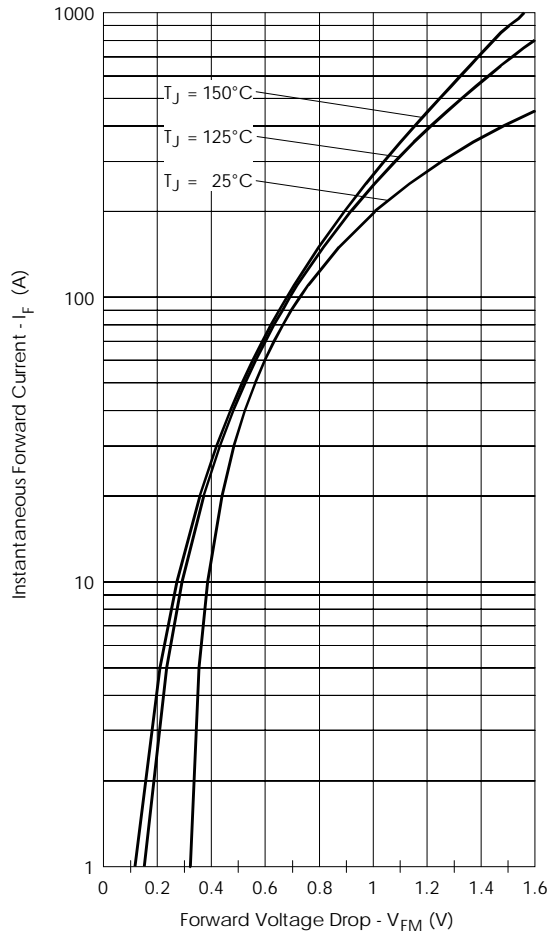


Fig. 1 - Maximum Forward Voltage Drop Characteristics

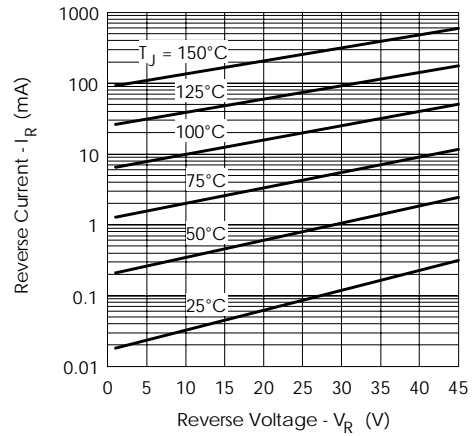


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

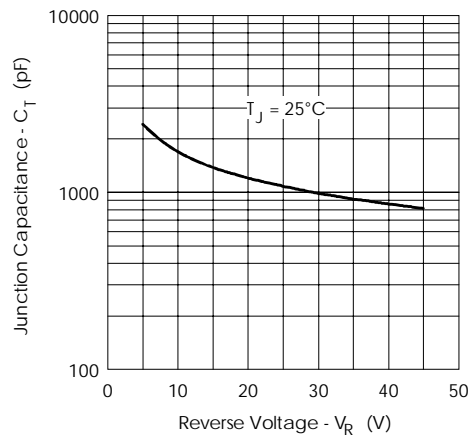


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

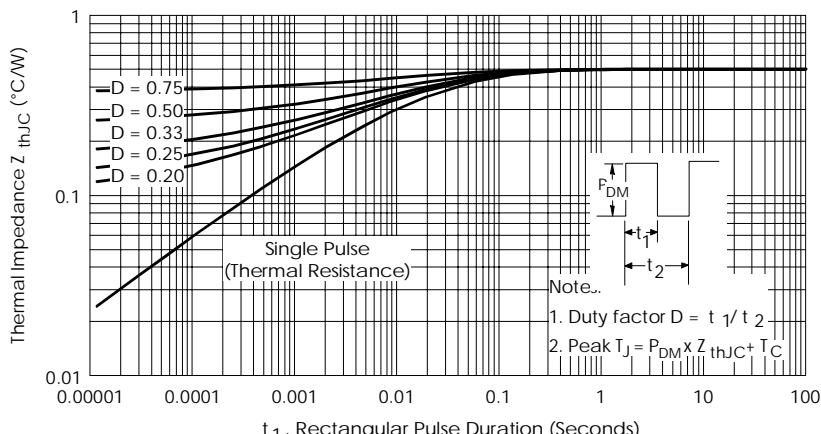


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

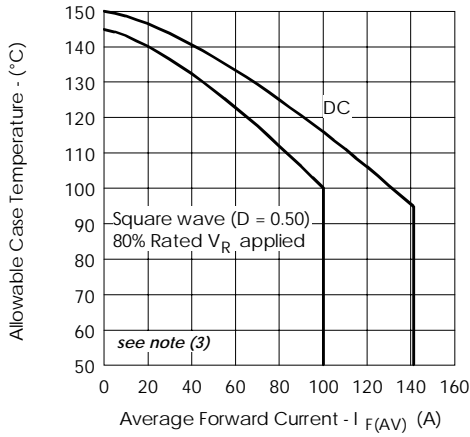


Fig.5- Maximum Allowable Case Temperature Vs. Average Forward Current

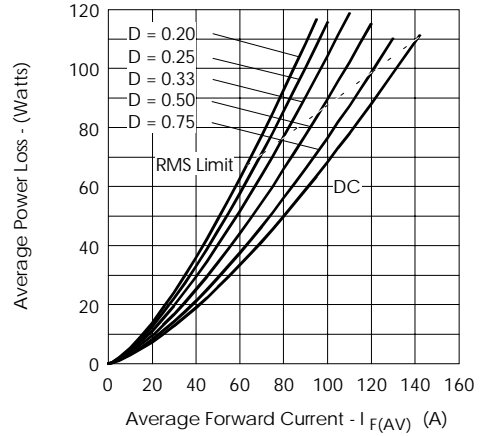


Fig.6- Forward Power Loss Characteristics

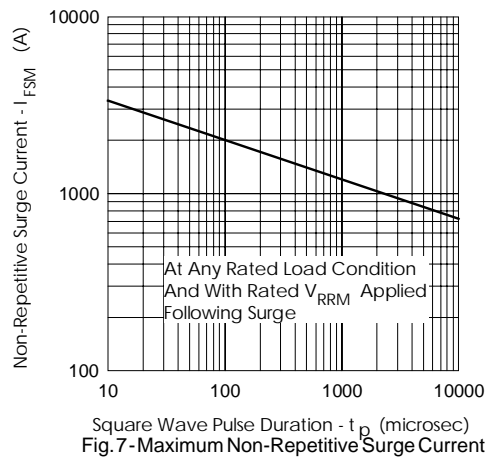


Fig.7- Maximum Non-Repetitive Surge Current

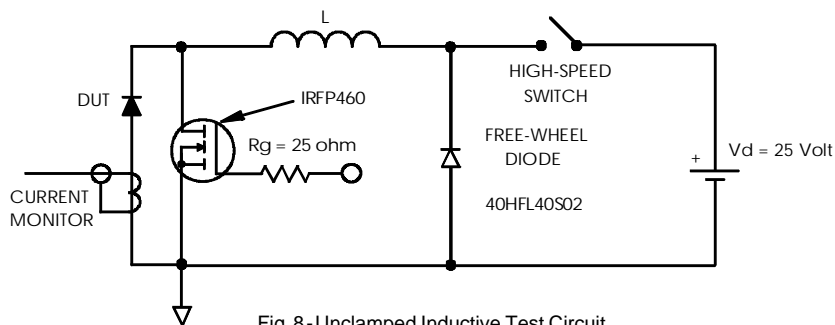




Fig.8- Unclamped Inductive Test Circuit

(3) Formula used: $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$;


$P_d =$ Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}} =$ Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\%$ rated V_R

Outline Table

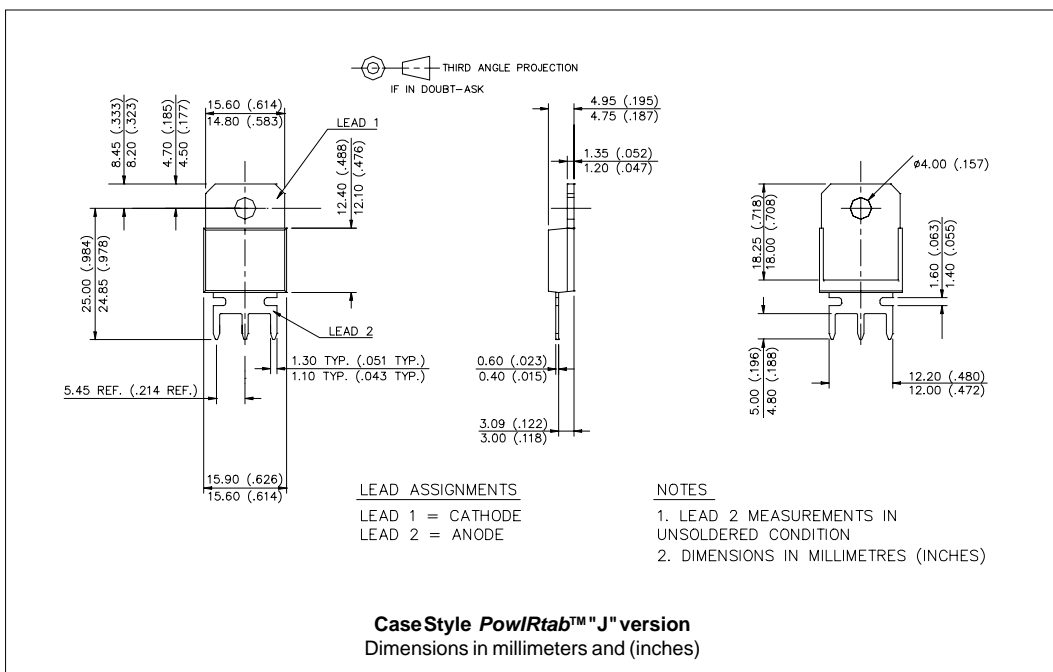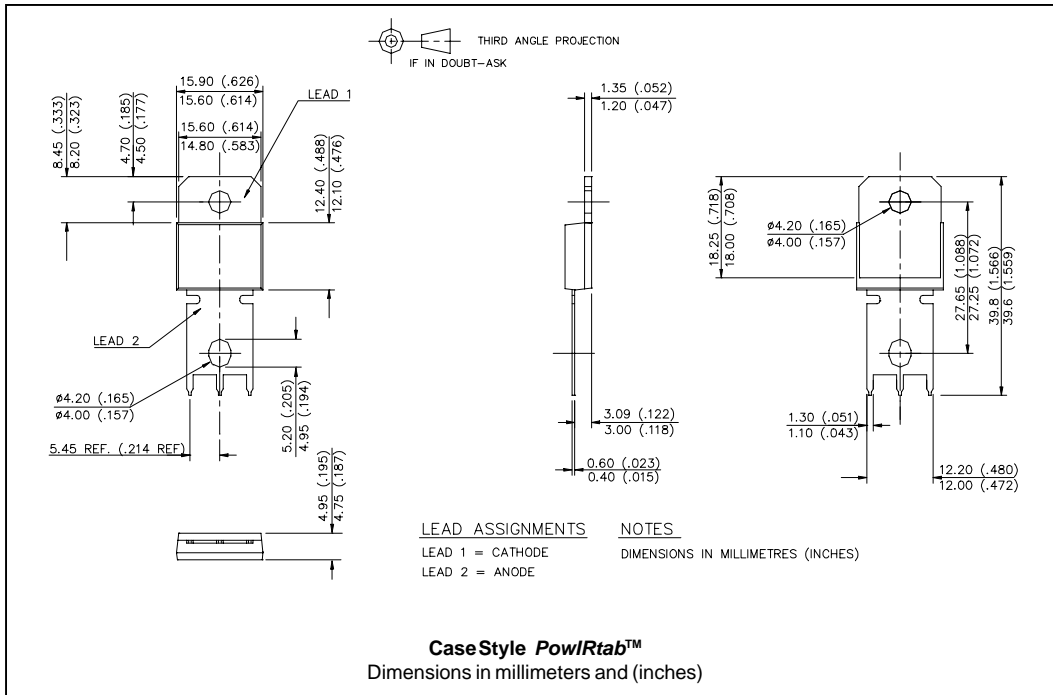

Ordering Information Table

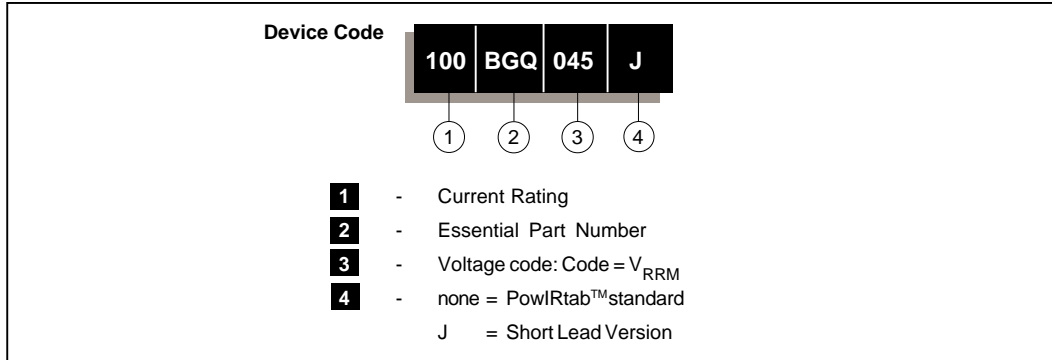

```

*****
This model has been developed by
Wizard SPICE MODEL GENERATOR(1999)
(International Rectifier Corporation)
contains Proprietary Information

*****
SPICE Model Diode is composed by a
simple diode plus paralld VCG2T
*****

.SUBCKT 100bgq45 ANO CAT
D1 ANO 1 DMOD (0.24359)
*Define diode model
.MODEL DMOD D(IS=6.61799286342482E-05A,N=1.0212796726385,BV=45V,
+IBV=0.115140026620575A,RS=0.0005748724,CJO=3.31930927290723E-08,
+VJ=0.456112448442971,XTI=2,EG=0.721992455742664)
*****
*Implementation of VCG2T
VX 1 2 DC 0V
R1 2 CAT TRES 1E-6
.MODEL TRES RES(R=1,TC1=9.83346387011944)
GP1 ANO CAT VALUE={-ABS(I(VX))*(EXP(((((-2.949174E-03/
9.833464)*((V(2,CAT)*1E6)/(I(VX)+1E-6)-1))+1)*6.600191E-2*ABS(V(ANO,CAT)))-1)}

*****
.ENDS 100bgq45

Thermal Model Subcircuit
.SUBCKT 100bgq45T 5 1

CTHERM1 5 4 1.66E+3
CTHERM2 4 3 2.22E+2
CTHERM3 3 2 1.48E+5
CTHERM4 2 1 3.12E+5

R THERM1 5 4 3.42E-2
R THERM2 4 3 2.55E-1
R THERM3 3 2 8.41E-2
R THERM4 2 1 1.81E-4

.ENDS 100bgq45T
    
```

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 12/02