

Multilayer Ceramic Chip Capacitors (For General Electronic Equipment)



Series: **ECJ**

■ Features

- Small size and wide capacitance range
- Superior humidity characteristics and long life due to the monolithic construction
- Excellent solderability and resistance to soldering heat due to terminals with three layers of silver, nickel and solder
- Low self-inductance and excellent frequency characteristics

■ Recommended Applications

Class 1 (T.C. Type)


Temperature compensations, tuned circuits and filter circuits, where low loss and high stability of capacitance and high insulation resistance are required

Class 2 (Hi-K Type)

Coupling and By-pass, where low loss and high stability of capacitance are not so important

■ Explanation of Part Numbers

ECJ Series

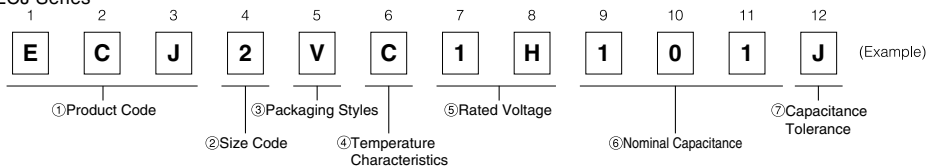


■ Product Code

ECJ : Multilayer Ceramic Chip Capacitors

■ Handling Precautions


■ Construction



No	Name
①	Ceramic dielectric
②	Inner electrode
③	Substrate electrode
④	Intermediate electrode
⑤	External electrode

■ Dimensions in mm (not to scale)

Unit : mm



Code	Size Code (EIA)	L	W	T	L1, L2
Z	"06" Type 0201	0.60±0.03	0.30±0.03	0.30±0.03	0.15±0.05
0	"10" Type 0402	1.00±0.05	0.50±0.05	0.50±0.05	0.2±0.1
1	"11" Type 0603	1.6±0.1	0.8±0.1	0.8±0.1	0.3±0.2
2	"12" Type 0805	2.0±0.1	1.25±0.10	0.6±0.1	0.50±0.25
				0.85±0.10	
				1.25±0.10	
3	"13" Type 1206	3.20±0.15	1.60±0.15	0.6±0.1	0.6±0.3
				0.85±0.10	
				1.15±0.10	
4	"23" Type 1210	3.2±0.3	2.5±0.2	1.6±0.2	0.6±0.3
				2.0±0.2	

■ Packaging Styles

Code	Packaging Style	"06" Type (0603)	"10" Type (1005)	"11" Type (1608)	"12" Type (2012)	"13" Type (3216)	"23" Type (3225)
X	Bulk						
E	Paper taping (Pitch:2 mm)			—	—	—	—
V	Paper taping (Pitch:4 mm)	—	—				—
F	Embossed taping (Pitch:4 mm) (3000 pcs./reel)	—	—	—	(T:1.25 mm)	(T:1.15 mm)	—
Y	Embossed taping (Pitch:4 mm) (2000 pcs./reel)	—	—	—	—	(T:1.6 mm)	
W	Large size reel (Pitch:2 mm)	—		—	—	—	—
Z	Large size reel (Pitch:4 mm)	—	—		(T:0.6 mm) (T:0.85 mm)	(T:0.6 mm) (T:0.85 mm)	—
C	Bulk case	—			(T:0.6 mm) (T:1.25 mm)	—	—

■ Temperature Coefficient

● Class 1 Capacitors/T.C. Tolerance (ppm/°C)

Code	Temp. Coeff. Code	T.C. Tolerance (ppm/°C)		
		≤2 pF	3 pF	≥4 pF
C	CΔ	CK(0±250)	CJ(0±120)	CH(0±60)
G	SL	+350 to -1000		

* Measurement of capacitance at 20 °C and 85 °C shall be made to calculate temperature characteristic
 * PΔ ~ UΔ: special order

characteristics	Temp. Coeff. (1) (ppm/°C)	Rate of Capacitance change at each Temperature			
		-25 °C		85 °C	
		Max..	Min.	Max.	Min.
CH	0± 60	0.49	-0.27	0.39	-0.39
CJ	0±120	0.82	-0.54	0.78	-0.78
CK	0±250	1.54	-1.13	1.63	-1.63
SL	-350 to -1000	—	—	2.28	-6.50

(1) These temperature coefficients are calculated between 20 °C and 85 °C

● Class 2

Code	Temperature Characteristic	Capacitance Change	Measurement Temperature Range	Reference Temperature
B	X7R (50 VDC, 25 VDC, 16 VDC:C≤2.2 μF)	±15 %	-55 to 125 °C	25 °C
	X5R (10 VDC, 6.3 VDC, 16 VDC:C>2.2 μF)	±15 %	-55 to 85 °C	25 °C
F	Y5V	+22, -82 %	-30 to 85 °C	25 °C

■ Rated Voltage

Code	1H	1E	1C	1A	0J
Rated Voltage	50 VDC	25 VDC	16 VDC	10 VDC	6.3 VDC

■ Nominal Capacitance



Ex	0R5	010	100	101	104	105
Nominal Capacitance	0.5 pF	1 pF	10 pF	100 pF	100000 pF (0.1μF)	1000000 pF (1μF)


■ Capacitance tolerance

Class	Tol. Code	Capacitance tolerance	
		≤10 pF	>10 pF
1	C	≤10 pF	±0.25 pF
	D		±0.5 pF
	F		±1.0 pF
	J	>10 pF	±5 %
	K		±10 %
2	K	±10 %	
	M	±20 %	
	Z	+80, 20 %	

Design and specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use.
 Whenever a doubt about safety arises from this product, please contact us immediately for technical consultation.

■ Specification

Characteristics	Specification		Test Method
	Class 1	Class 2	
Operating Temperature Range	C4 -55 to 125 °C -25 to 85 °C (13 Type, 5100 to 10000 pF) SL: -55 to 125 °C	B (X7R): -55 to 125 °C (50 VDC, 25 VDC, 16 VDC:C≤2.2 μF) B (X5R): -55 to 85 °C (10 VDC, 6.3 VDC, 16 VDC:C>2.2 μF) F (Y5V): -25 to 85 °C	
Rated Voltage	C4, SL:50 VDC	B (X7R): 50 VDC, 25 VDC, 16 VDC, B (X5R):10 VDC, 6.3 VDC F (Y5V):50 VDC, 25 VDC, 16 VDC, 10 VDC	
Dielectric Withstanding Voltage	No break down		Test Voltage: Class 1:Rated Voltage ×3 Class 2:Rated Voltage ×2.5 Electrification time:1 to 5s Limit surge current:50 mA max.
Insulation Resistance (I R)	10000 MΩ or 500/C MΩ whichever is less. (C:Nominal Cap. in μF)		Measuring voltage:Rated voltage Measuring voltage time:60±5s Charge/discharge current:within 50 mA
Capacitance	within the specified tolerance		Class 1
Q Factor or Dissipation Factor (tan δ)	C<30 pF Q≥400+20C 30 pF≤C≤1000 pF:Q≥1000 C>1000 pF:tan δ≤0.002 (C:Nominal Cap. in pF)	Tan δ B: 0.025max. (50 VDC, 25 VDC, 16 VDC: C≤2.2 μF) 0.05max. (16 VDC:C>2.2 μF, 10 VDC, 6.3 VDC) F: 0.05max.(50 VDC, 25 VDC) 0.07max.(16 VDC) 0.125max.(10 VDC)	Measuring Freq. ≤1000 pF:1 MHz±10 % >1000 pF:1 kHz±10 % Measuring Voltage:0.5 to 5 Vrms Class 2 Preconditioning:Heat Treatment (Class 2) Measuring Freq.:1 kHz±10 % Measuring Voltage:1.0±0.2 Vrms
Temperature Characteristics	CK: 0±250 ppm/ °C CJ: 0±120 ppm/ °C CH: 0±60 ppm/ °C SL:+350 to -1000 ppm/ °C	B:±10 %(-25 to 85 °C) F:+30, -80 %(-25 to 85 °C)	Maximum capacitance change at stage 1 to 5 Stage 1:+20 °C Stage 2:-25 °C Stage 3:+20 °C (Reference Temperature) Stage 4:+85 °C Stage 5:+20 °C 6.3V DC and 4.7 μF of Temp. Char. B; 0.2±0.02 Vrms measurement voltage.
Adhesion	The terminal electrode shall be free from peeling or signs of peeling.		Solder the specimen to the testing jig shown in the figure., and apply a 5 N force in the arrow direction for 10 seconds. <u>Test of "11", "12", "13", "23" type</u>  <u>Test of "06", "10" type</u> 

Characteristics	Specification		Test Method									
	Class 1	Class 2										
Bending Strength	Appearance:no mechanical damage Capacitance Change: Within $\pm 5\%$ or $\pm 0.5\text{ pF}$ whichever is larger.	Appearance:no mechanical damage Capacitance Change: B:Within $\pm 12.5\%$ F:Within $\pm 30\%$	Bending value:1 mm Bending speed:1 mm/s Test PC board:JIS C 6429 									
Solderability	More than 95 % of the soldered area of both terminal electrodes shall be covered with fresh solder.		Solder temperature:230 \pm 5 °C Dipping period:4 \pm 1 s									
Resistance to Solder Heat	Appearance:no mechanical damage Capacitance Change: Within $\pm 2.5\%$ or $\pm 0.25\text{ pF}$ whichever is the larger. Q:initial value IR:initial value With-stand voltage: no dielectric breakdown or damage	Appearance:no mechanical damage Capacitance Change: B:Within $\pm 7.5\%$ F:Within $\pm 20\%$ tan δ initial value (16 V DC,F,C \geq 1 μ F 0.09max.) IR:initial value With-stand voltage: no dielectric breakdown or damage	Preconditioning:Heat Treatment (Class 2) Solder temperature:270 \pm 5 °C Dipping period:3.0 \pm 0.5 s Preheat Condition:									
			<table border="1"> <thead> <tr> <th>Temp.</th> <th>06,10,11,12Type</th> <th>13,23Type</th> </tr> </thead> <tbody> <tr> <td>80 to 100 °C</td> <td>120 to 180s</td> <td>300 to 360s</td> </tr> <tr> <td>150 to 200 °C</td> <td>120 to 180s</td> <td>300 to 360s</td> </tr> </tbody> </table>	Temp.	06,10,11,12Type	13,23Type	80 to 100 °C	120 to 180s	300 to 360s	150 to 200 °C	120 to 180s	300 to 360s
			Temp.	06,10,11,12Type	13,23Type							
80 to 100 °C	120 to 180s	300 to 360s										
150 to 200 °C	120 to 180s	300 to 360s										
Recovery: Class 1:24 \pm 2 h Class 2:48 \pm 4 h												
Temperature cycle	Appearance:no mechanical damage Capacitance Change: Within $\pm 2.5\%$ or $\pm 0.25\text{ pF}$ whichever is the larger. Q:initial value IR:initial value With-stand voltage: no dielectric breakdown or damage	Appearance:no mechanical damage Capacitance Change: B:Within $\pm 7.5\%$ F:Within $\pm 20\%$ tan δ initial value (16 V DC,F,C \geq 1 μ F 0.09max.) IR:initial value With-stand voltage: no dielectric breakdown or damage	Preconditioning:Heat Treatment (Class 2) Condition of one cycle Step 1:Minimum operation temp. 30 \pm 3 min. Step 2:Room temp. 3 min. Step 3:Maximum operation temp. 30 \pm 3 min. Step 4:Room temp. 3 min. Number of cycles:5 Recovery: Class 1:24 \pm 2 h Class 2:48 \pm 4 h									
Damp Heat (steady state)	Appearance:no mechanical damage Capacitance Change: Within $\pm 5\%$ or $\pm 0.5\text{ pF}$ whichever is the larger. Q tan δ : C<10 pF:Q \geq 200+10C 10 pF \leq C<30 pF:Q \geq 275+5C/2 30 pF \leq C \leq 1000 pF:Q \geq 350 C>1000 pF:tan δ \leq 0.004 C:Nominal capacitance (pF) IR: 1000 M Ω or 50/C M Ω Whichever is less. (C:Rated capacitance in μ F)	Appearance:no mechanical damage Capacitance Change: B:Within $\pm 12.5\%$ F:Within $\pm 30\%$ tan δ B: 0.05 max. (50 VDC, 25 VDC, 16 VDC: C \leq 2.2 μ F) 0.075 max. (16 VDC:C>2.2 μ F, 10 VDC, 6.3 VDC) F: 0.075 max.(50 VDC, 25 VDC) 0.10 max.(16 VDC) 0.125 max.(16 VDC C>1 μ F) 0.15 max.(10 VDC) IR: 1000 M Ω or 50/C M Ω Whichever is less. (C:Rated capacitance in μ F)	Preconditioning:Heat Treatment (Class 2) Temperature:40 \pm 2 °C Relative humidity:90 to 95 %RH Test period:500+24/0 h Recovery: Class 1:24 \pm 2 h Class 2:48 \pm 4 h									

Characteristics	Specification		Test Method
	Class 1	Class 2	
Loading under Damp Heat	Appearance:no mechanical damage Capacitance Change: Within $\pm 7.5\%$ or ± 0.75 pF whichever is the larger. Q tan δ : C<30 pF:Q \geq 100+10C/3 30 pF \leq C \leq 1000 pF:Q \geq 200 C>1000 pF:tan δ \leq 0.004 C:Nominal capacitance (pF) IR: 500 M Ω or 25/C M Ω Which-ever is less. (C:Rated capacitance in μ F)	Appearance:no mechanical damage Capacitance Change: B:Within $\pm 12.5\%$ F:Within $\pm 30\%$ tan δ B: 0.05 max. (50 VDC, 25 VDC, 16 VDC: C \leq 2.2 μ F) 0.075 max. (16 VDC:C>2.2 μ F, 10 VDC, 6.3 VDC) F: 0.075 max.(50 VDC, 25 VDC) 0.10 max.(16 VDC) 0.125 max.(16 VDC C>1 μ F) 0.15 max.(10 VDC) IR: 500 M Ω or 25/C M Ω Which-ever is less. (C:Rated capacitance in μ F)	Preconditioning:Voltage Treatment (Class 2) Temperature:40 \pm 2 $^{\circ}$ C Relative humidity:90 to 95 %RH Applied voltage:Rated voltage Test period:500+24/0 h Recovery: Class 1:24 \pm 2 h Class 2:48 \pm 4 h
Loading at high temperature	Appearance:no mechanical damage Capacitance Change: Within $\pm 3\%$ or ± 0.3 pF whichever is the larger. Q tan δ : C<10 pF:Q \geq 200+10C 10 pF \leq C \leq 30 pF:Q \geq 275+5C/2 30 pF \leq C \leq 1000 pF:Q \geq 350 C>1000 pF:tan δ \leq 0.004 C:Nominal capacitance (pF) IR: 1000 M Ω or 50/C M Ω Whichever is less. (C:Rated capacitance in μ F)	Appearance:no mechanical damage Capacitance Change: B:Within $\pm 12.5\%$ F:Within $\pm 30\%$ tan δ B: 0.04 max. (50 VDC, 25 VDC, 16 VDC: C \leq 2.2 μ F) 0.075 max. (16 VDC:C>2.2 μ F, 10 VDC, 6.3 VDC) F: 0.075 max.(50 VDC, 25 VDC) 0.10 max.(16 VDC) 0.125 max.(16 VDC C>1 μ F) 0.15 max.(10 VDC) IR: 1000 M Ω or 50/C M Ω Whichever is less. (C:Rated capacitance in μ F)	Preconditioning:VoltageTreatment (Class 2) Temperature:Maximum operation temp. ± 3 $^{\circ}$ C Applied voltage:Rated voltage $\times 2$ Test period:1000+48/0 h Recovery: Class 1:24 \pm 2 h Class 2:48 \pm 4 h

Note 1) Heat treatment:1 h of heat treatment at 150+0/-10 $^{\circ}$ C followed by 48 \pm 4 h recovery under the standead condition

Note 2) voltage treatment:1 h of voltage treatment under the specified temperature and voltage for testing followed by 48 \pm 4 h of recovery under the standead condition

■ Standard Products for "06" (EIA "0201" Type) , Taped Version

Capacitance (pF)	Capacitance Tolerance	C4				Capacitance (pF)	Cap Tol.	B/X7R									
		25 VDC		16 VDC				25 VDC		16 VDC		10 VDC		6.3 VDC			
		Part No.	Dim T (mm)	Part No.	Dim T (mm)			Part No.	Dim T (mm)	Part No.	Dim T (mm)	Part No.	Dim T (mm)	Part No.	Dim T (mm)		
0.5	±0.25 pF(C)	ECJZEC1E0R5C	0.3			100											
1		ECJZEC1E010□	0.3			120											
1.5		ECJZEC1E1R5□	0.3			150		ECJZEB1E151□	0.3								
2	±0.25 pF (C) or (D)	ECJZEC1E020□	0.3			180											
3		ECJZEC1E030□	0.3			220		ECJZEB1E221□	0.3								
4		ECJZEC1E040□	0.3			270											
5		ECJZEC1E050□	0.3			330		ECJZEB1E331□	0.3								
6		ECJZEC1E060D	0.3			390											
7		ECJZEC1E070D	0.3			470		ECJZEB1E471□	0.3								
8		ECJZEC1E080D	0.3			560											
9		ECJZEC1E090D	0.3			680		ECJZEB1E681□	0.3								
10	±0.5 pF(D) or ±1 pF(F)	ECJZEC1E100□	0.3			820											
						1000		ECJZEB1E102□	0.3								
12		ECJZEC1E120□	0.3			1200	±10% (K)										
15		ECJZEC1E150□	0.3			1500	or			ECJZEB1C152□	0.3						
18		ECJZEC1E180□	0.3			1800	±20% (M)										
22		ECJZEC1E220□	0.3			2200				ECJZEB1C222□	0.3						
27		ECJZEC1E270□	0.3			2700											
33	±5% (J) or ±10% (K)	ECJZEC1E330□	0.3			3300						ECJZEB1A332□	0.3				
39						3900											
47						4700										ECJZEB0J472□	0.3
56						5600											
68						6800										ECJZEB0J682□	0.3
82						8200											
100						10000										ECJZEB0J103□	0.3

* □: Capacitance Tolerance Code.

** Packaging Style Code: "E" for Taped Version (Taping pitch: 2 mm)

■ Standard Products for “10” Type (EIA “0402” Type) , Taped Version

Capacitance (pF)	Capacitance Tolerance	CΔ		SL	
		50 VDC		50 VDC	
		Part No.	Dim T (mm)	Part No.	Dim T (mm)
0.5	±0.25 pF(C)	ECJ0EC1H0R5C	0.5	ECJ0EG1H0R5C	0.5
1	±0.25 pF (C) or ±0.5 pF (D)	ECJ0EC1H010□	0.5	ECJ0EG1H010□	0.5
1.5		ECJ0EC1H1R5□	0.5	ECJ0EG1H1R5□	0.5
2		ECJ0EC1H020□	0.5	ECJ0EG1H020□	0.5
3		ECJ0EC1H030□	0.5	ECJ0EG1H030□	0.5
4		ECJ0EC1H040□	0.5	ECJ0EG1H040□	0.5
5		ECJ0EC1H050□	0.5	ECJ0EG1H050□	0.5
6	±0.5 pF (D)	ECJ0EC1H060D	0.5	ECJ0EG1H060D	0.5
7		ECJ0EC1H070D	0.5	ECJ0EG1H070D	0.5
8		ECJ0EC1H080D	0.5	ECJ0EG1H080D	0.5
9		ECJ0EC1H090D	0.5	ECJ0EG1H090D	0.5
10	±0.5 pF(D) or ±1 pF(F)	ECJ0EC1H100□	0.5	ECJ0EG1H100□	0.5
12	±5 % (J) or ±10 % (K)	ECJ0EC1H120□	0.5	ECJ0EG1H120□	0.5
15		ECJ0EC1H150□	0.5	ECJ0EG1H150□	0.5
18		ECJ0EC1H180□	0.5	ECJ0EG1H180□	0.5
22		ECJ0EC1H220□	0.5	ECJ0EG1H220□	0.5
27		ECJ0EC1H270□	0.5	ECJ0EG1H270□	0.5
33		ECJ0EC1H330□	0.5	ECJ0EG1H330□	0.5
39		ECJ0EC1H390□	0.5	ECJ0EG1H390□	0.5
47		ECJ0EC1H470□	0.5	ECJ0EG1H470□	0.5
56		ECJ0EC1H560□	0.5	ECJ0EG1H560□	0.5
68		ECJ0EC1H680□	0.5	ECJ0EG1H680□	0.5
82		ECJ0EC1H820□	0.5	ECJ0EG1H820□	0.5
100		ECJ0EC1H101□	0.5	ECJ0EG1H101□	0.5
120		ECJ0EC1H121□	0.5	ECJ0EG1H121□	0.5
150		ECJ0EC1H151□	0.5	ECJ0EG1H151□	0.5
180		ECJ0EC1H181□	0.5	ECJ0EG1H181□	0.5
220	ECJ0EC1H221□	0.5	ECJ0EG1H221□	0.5	

* □: Capacitance Tolerance Code.

** Packaging Style Code: “E” for Taped Version (Taping pitch: 2 mm) and “X” for Bulk Type

■ Standard Products for “10” (EIA “0402” Type) , Taped Version

Capacitance (pF)	Capacitance Tolerance	B/X7R								Capacitance Tolerance	F/Y5V						
		50 VDC		25 VDC		16 VDC		10 VDC			50 VDC		25 VDC		16 VDC		
		Part No.	Dim T (mm)	Part No.	Dim T (mm)	Part No.	Dim T (mm)	Part No.	Dim T (mm)		Part No.	Dim T (mm)	Part No.	Dim T (mm)	Part No.	Dim T (mm)	
100		ECJ0EB1H101□	0.5	ECJ0EB1E101□	0.5												
120		ECJ0EB1H121K	0.5	ECJ0EB1E121K	0.5												
150		ECJ0EB1H151□	0.5	ECJ0EB1H151□	0.5												
180		ECJ0EB1H181K	0.5	ECJ0EB1E181K	0.5												
220		ECJ0EB1H221□	0.5	ECJ0EB1E221□	0.5												
270		ECJ0EB1H271K	0.5	ECJ0EB1E271K	0.5												
330		ECJ0EB1H331□	0.5	ECJ0EB1E331□	0.5												
390		ECJ0EB1H391K	0.5	ECJ0EB1E391K	0.5												
470		ECJ0EB1H471□	0.5	ECJ0EB1E471□	0.5												
560		ECJ0EB1H561K	0.5	ECJ0EB1E561K	0.5												
680		ECJ0EB1H681□	0.5	ECJ0EB1E681□	0.5												
820		ECJ0EB1H821K	0.5	ECJ0EB1E821K	0.5												
1000		ECJ0EB1H102□	0.5	ECJ0EB1E102□	0.5								ECJ0EF1H102Z	0.5	ECJ0EF1E102Z	0.5	
1200		ECJ0EB1H122K	0.5	ECJ0EB1E122K	0.5												
1500		ECJ0EB1H152□	0.5	ECJ0EB1E152□	0.5								ECJ0EF1H152Z	0.5	ECJ0EF1E152Z	0.5	
1800		ECJ0EB1H182K	0.5	ECJ0EB1E182K	0.5												
2200		ECJ0EB1H222□	0.5	ECJ0EB1E222□	0.5								ECJ0EF1H222Z	0.5	ECJ0EF1E222Z	0.5	
2700		ECJ0EB1H272K	0.5	ECJ0EB1E272K	0.5												
3300	±10%(K) or ±20%(M)	ECJ0EB1H332□	0.5	ECJ0EB1E332□	0.5								ECJ0EF1H332Z	0.5	ECJ0EF1E332Z	0.5	
3900		ECJ0EB1H392K	0.5	ECJ0EB1E392K	0.5												
4700				ECJ0EB1E472□	0.5								ECJ0EF1H472Z	0.5	ECJ0EF1E472Z	0.5	
5600				ECJ0EB1E562K	0.5	ECJ0EB1C562K	0.5										
6800				ECJ0EB1E682□	0.5	ECJ0EB1C682□	0.5						ECJ0EF1H682Z	0.5	ECJ0EF1E682Z	0.5	
8200						ECJ0EB1C822K	0.5										
10000						ECJ0EB1C103□	0.5						ECJ0EF1H103Z	0.5	ECJ0EF1E103Z	0.5	
12000						ECJ0EB1C123K	0.5										
15000						ECJ0EB1C153□	0.5							ECJ0EF1E153Z	0.5	ECJ0EF1C153Z	0.5
18000						ECJ0EB1C183K	0.5										
22000						ECJ0EB1C223□	0.5							ECJ0EF1E223Z	0.5	ECJ0EF1C223Z	0.5
27000								ECJ0EB1A273K	0.5								
33000								ECJ0EB1A333□	0.5						ECJ0EF1C333Z	0.5	
39000								ECJ0EB1A393K	0.5								
47000								ECJ0EB1A473□	0.5						ECJ0EF1C473Z	0.5	
56000								ECJ0EB1A563K	0.5								
68000								ECJ0EB1A683□	0.5						ECJ0EF1C683Z	0.5	
82000								ECJ0EB1A823K	0.5								
100000								ECJ0EB1A104□	0.5						ECJ0EF1C104Z	0.5	
220000								Under development	0.5								

* □: Capacitance Tolerance Code.

** Packaging Style Code: “E” for Taped Version (Taping pitch: 2 mm) and “X” for Bulk Type

■ Standard Products for “11” Type (EIA “0603” Type) , Taped Version

Capacitance (pF)	Capacitance Tolerance	C4(NPO)		SL	
		50 VDC		50 VDC	
		Part No.	Dim T (mm)	Part No.	Dim T (mm)
0.5	±0.25 pF(C)	ECJ1VC1H0R5C	0.8	ECJ1VG1H0R5C	0.8
1	±0.25 pF (C) or ±0.5 pF (D)	ECJ1VC1H010□	0.8	EGJ1VG1H010□	0.8
1.5		ECJ1VC1H1R5□	0.8	ECJ1VG1H1R5□	0.8
2		ECJ1VC1H020□	0.8	ECJ1VG1H020□	0.8
3		ECJ1VC1H030□	0.8	ECJ1VG1H030□	0.8
4		ECJ1VC1H040□	0.8	ECJ1VG1H040□	0.8
5		ECJ1VC1H050□	0.8	ECJ1VG1H050□	0.8
6	±0.5 pF (D)	ECJ1VC1H060D	0.8	ECJ1VG1H060D	0.8
7		ECJ1VC1H070D	0.8	ECJ1VG1H070D	0.8
8		ECJ1VC1H080D	0.8	ECJ1VG1H080D	0.8
9		ECJ1VC1H090D	0.8	ECJ1VG1H090D	0.8
10	±0.5 pF(D) or ±1 pF(F)	ECJ1VC1H100□	0.8	ECJ1VG1H100□	0.8
12	±5 %(J) or ±10 %(K)	ECJ1VC1H120□	0.8	ECJ1VG1H120□	0.8
15		ECJ1VC1H150□	0.8	ECJ1VG1H150□	0.8
18		ECJ1VC1H180□	0.8	ECJ1VG1H180□	0.8
22		ECJ1VC1H220□	0.8	ECJ1VG1H220□	0.8
27		ECJ1VC1H270□	0.8	ECJ1VG1H270□	0.8
33		ECJ1VC1H330□	0.8	ECJ1VG1H330□	0.8
39		ECJ1VC1H390□	0.8	ECJ1VG1H390□	0.8
47		ECJ1VC1H470□	0.8	ECJ1VG1H470□	0.8
56		ECJ1VC1H560□	0.8	ECJ1VG1H560□	0.8
68		ECJ1VC1H680□	0.8	ECJ1VG1H680□	0.8
82		ECJ1VC1H820□	0.8	ECJ1VG1H820□	0.8
100		ECJ1VC1H101□	0.8	ECJ1VG1H101□	0.8
120		ECJ1VC1H121□	0.8	ECJ1VG1H121□	0.8
150		ECJ1VC1H151□	0.8	ECJ1VG1H151□	0.8
180		ECJ1VC1H181□	0.8	ECJ1VG1H181□	0.8
220		ECJ1VC1H221□	0.8	ECJ1VG1H221□	0.8
270		ECJ1VC1H271□	0.8	ECJ1VG1H271□	0.8
330		ECJ1VC1H331□	0.8	ECJ1VG1H331□	0.8
390		ECJ1VC1H391□	0.8	ECJ1VG1H391□	0.8
470		ECJ1VC1H471□	0.8	ECJ1VG1H471□	0.8
560	ECJ1VC1H561□	0.8	ECJ1VG1H561□	0.8	
680	ECJ1VC1H681□	0.8	ECJ1VG1H681□	0.8	
820	ECJ1VC1H821□	0.8	ECJ1VG1H821□	0.8	
1000	ECJ1VC1H102□	0.8	ECJ1VG1H102□	0.8	

* □: Capacitance Tolerance Code.

** Packaging Style Code: "V" for Taped Version (Taping pitch: 4 mm) and "X" for Bulk Type

■ Standard Products for “11” Type (EIA “0603” Type) , Taped Version

Capacitance (pF)	B/X7R										F/Y5V									
	50 VDC		25 VDC		16 VDC		10 VDC		6.3 VDC		50 VDC		25 VDC		16 VDC		10 VDC			
	Part No.	Dim. T (mm)	Part No.	Dim. T (mm)	Part No.	Dim. T (mm)	Part No.	Dim. T (mm)	Part No.	Dim. T (mm)	Part No.	Dim. T (mm)	Part No.	Dim. T (mm)	Part No.	Dim. T (mm)	Part No.	Dim. T (mm)		
1000	ECJ1VB1H102□	0.8									ECJ1VF1H102Z	0.8								
1200	ECJ1VB1H122K	0.8																		
1500	ECJ1VB1H152□	0.8									ECJ1VF1H152Z	0.8								
1800	ECJ1VB1H182K	0.8																		
2200	ECJ1VB1H222K□	0.8									ECJ1VF1H222Z	0.8								
2700	ECJ1VB1H272K	0.8																		
3300	ECJ1VB1H332□	0.8									ECJ1VF1H332Z	0.8								
3900	ECJ1VB1H392K	0.8																		
4700	ECJ1VB1H472□	0.8									ECJ1VF1H472Z	0.8								
5600	ECJ1VB1H562K	0.8																		
6800	ECJ1VB1H682□	0.8									ECJ1VF1H682Z	0.8								
8200	ECJ1VB1H822K	0.8																		
10000	ECJ1VB1H103□	0.8	ECJ1VB1E103□	0.8	ECJ1VB1C103□	0.8					ECJ1VF1H103Z	0.8								
12000	ECJ1VB1H123K	0.8	ECJ1VB1E123K	0.8	ECJ1VB1C123K	0.8														
15000	ECJ1VB1H153□	0.8	ECJ1VB1E153□	0.8	ECJ1VB1C153□	0.8					ECJ1VF1H153Z	0.8								
18000			ECJ1VB1E183K	0.8	ECJ1VB1C183K	0.8														
22000			ECJ1VB1E223□	0.8	ECJ1VB1C223□	0.8					ECJ1VF1H223Z	0.8								
27000			ECJ1VB1E273K	0.8	ECJ1VB1C273K	0.8														
33000	±10 % (K) or ±20 % (M)		ECJ1VB1E333□	0.8	ECJ1VB1C333□	0.8					ECJ1VF1H333Z	0.8								
39000			ECJ1VB1E393K	0.8	ECJ1VB1C393K	0.8														
47000			ECJ1VB1E473□	0.8	ECJ1VB1C473□	0.8					ECJ1VF1H473Z	0.8								
56000					ECJ1VB1C563K	0.8														
68000					ECJ1VB1C683□	0.8					ECJ1VF1H683Z	0.8	ECJ1VF1E683Z	0.8						
82000					ECJ1VB1C823K	0.8														
100000					ECJ1VB1C104□	0.8					ECJ1VF1H104Z	0.8	ECJ1VF1E104Z	0.8	ECJ1VF1C104Z	0.8				
120000									ECJ1VB1A124K	0.8										
150000									ECJ1VB1A154□	0.8					ECJ1VF1C154Z	0.8				
180000									ECJ1VB1A184K	0.8										
220000									ECJ1VB1A224□	0.8					ECJ1VF1C224Z	0.8				
270000																				
330000															ECJ1VF1C334Z	0.8				
390000																				
470000																				
560000																				
680000																				
820000																		ECJ1VF1A684Z	0.8	
1000000																				
2200000																			ECJ1VF1A105Z	0.8
4700000																				

* □: Capacitance Tolerance Code.

** Packaging Style Code: “V” for Taped Version (Taping pitch: 4 mm) and “X” for Bulk Type

■ Standard Products for “12” Type (EIA “0805” Type) , Taped Version

Capacitance (pF)	Capacitance Tolerance	CΔ(NPO)		SL	
		50 VDC		50 VDC	
		Part No.	Dim T (mm)	Part No.	Dim T (mm)
0.5	±0.25 pF(C)	ECJ2VC1H0R5C	0.6	ECJ2VG1H0R5C	0.6
1	±0.25 pF (C) or ±0.5 pF (D)	ECJ2VC1H010□	0.6	ECJ2VG1H010□	0.6
1.5		ECJ2VC1H1R5□	0.6	ECJ2VG1H1R5□	0.6
2		ECJ2VC1H020□	0.6	ECJ2VG1H020□	0.6
3		ECJ2VC1H030□	0.6	ECJ2VG1H030□	0.6
4		ECJ2VC1H040□	0.6	ECJ2VG1H040□	0.6
5		ECJ2VC1H050□	0.6	ECJ2VG1H050□	0.6
6	±0.5 pF(D)	ECJ2VC1H060D	0.6	ECJ2VG1H060D	0.6
7		ECJ2VC1H070D	0.6	ECJ2VG1H070D	0.6
8		ECJ2VC1H080D	0.6	ECJ2VG1H080D	0.6
9		ECJ2VC1H090D	0.6	ECJ2VG1H090D	0.6
10	±0.5 pF(D) or ±1 pF(F)	ECJ2VC1H100□	0.6	ECJ2VG1H100□	0.6
12	±5 % (J) or ±10 % (K)	ECJ2VC1H120□	0.6	ECJ2VG1H120□	0.6
15		ECJ2VC1H150□	0.6	ECJ2VG1H150□	0.6
18		ECJ2VC1H180□	0.6	ECJ2VG1H180□	0.6
22		ECJ2VC1H220□	0.6	ECJ2VG1H220□	0.6
27		ECJ2VC1H270□	0.6	ECJ2VG1H270□	0.6
33		ECJ2VC1H330□	0.6	ECJ2VG1H330□	0.6
39		ECJ2VC1H390□	0.6	ECJ2VG1H390□	0.6
47		ECJ2VC1H470□	0.6	ECJ2VG1H470□	0.6
56		ECJ2VC1H560□	0.6	ECJ2VG1H560□	0.6
68		ECJ2VC1H680□	0.6	ECJ2VG1H680□	0.6
82		ECJ2VC1H820□	0.6	ECJ2VG1H820□	0.6
100		ECJ2VC1H101□	0.6	ECJ2VG1H101□	0.6
120		ECJ2VC1H121□	0.6	ECJ2VG1H121□	0.6
150		ECJ2VC1H151□	0.6	ECJ2VG1H151□	0.6
180		ECJ2VC1H181□	0.6	ECJ2VG1H181□	0.6
220		ECJ2VC1H221□	0.6	ECJ2VG1H221□	0.6
270		ECJ2VC1H271□	0.6	ECJ2VG1H271□	0.6
330		ECJ2VC1H331□	0.6	ECJ2VG1H331□	0.6
390		ECJ2VC1H391□	0.6	ECJ2VG1H391□	0.6
470		ECJ2VG1H471□	0.6	ECJ2VG1H471□	0.6
560		ECJ2VC1H561□	0.6	ECJ2VG1H561□	0.6
680		ECJ2VC1H681□	0.6	ECJ2VG1H681□	0.6
820		ECJ2VC1H821□	0.6	ECJ2VG1H821□	0.6
1000		ECJ2VC1H102□	0.6	ECJ2VG1H102□	0.6
1200		ECJ2VC1H122□	0.6	ECJ2VG1H122□	0.6
1500		ECJ2VC1H152□	0.6	ECJ2VG1H152□	0.6
1800		ECJ2VC1H182□	0.6	ECJ2VG1H182□	0.6
2200	ECJ2VC1H222□	0.6	ECJ2VG1H222□	0.6	
2700	ECJ2VC1H272□	0.85	ECJ2VG1H272□	0.6	

* □ : Capacitance Tolerance Code.

** Packaging Style Code: "V" for Taped Version (Taping pitch: 4 mm) and "X" for Bulk Type

We will discontinue CΔ and SL Temp. Char. of 0805 type whose range is from 0.5 pF to 820 pF by the end of 2001.

■ Standard Products for "12" Type (EIA "0805" Type) , Taped Version

Capacitance (pF)	B/X7R										F/Y5V								
	50 VDC		25 VDC		16 VDC		10 VDC		6.3 VDC		Capacitance Tolerance	50 VDC		25 VDC		16 VDC		10 VDC	
	Part No.	Dim (mm)	Part No.	Dim (mm)	Part No.	Dim (mm)	Part No.	Dim (mm)	Part No.	Dim (mm)		Part No.	Dim (mm)	Part No.	Dim (mm)	Part No.	Dim (mm)	Part No.	Dim (mm)
1000	ECJ2VB1H102□	0.6																	
1200	ECJ2VB1H122K	0.6																	
1500	ECJ2VB1H152□	0.6																	
1800	ECJ2VB1H182K	0.6																	
2200	ECJ2VB1H222□	0.6																	
2700	ECJ2VB1H272K	0.6																	
3300	ECJ2VB1H332□	0.6																	
3900	ECJ2VB1H392K	0.6																	
4700	ECJ2VB1H472□	0.6																	
5600	ECJ2VB1H562K	0.6																	
6800	ECJ2VB1H682□	0.6																	
8200	ECJ2VB1H822K	0.6																	
10000	ECJ2VB1H103□	0.6										ECJ2VF1H103Z	0.6						
12000	ECJ2VB1H123K	0.6																	
15000	ECJ2VB1H153□	0.6										ECJ2VF1H153Z	0.6						
18000	ECJ2VB1H183K	0.6																	
22000	ECJ2VB1H223□	0.6										ECJ2VF1H223Z	0.6						
27000	ECJ2VB1H273K	0.65																	
33000	ECJ2VB1H333□	0.85										ECJ2VF1H333Z	0.6						
39000	ECJ2VB1H393K	0.85	ECJ2VB1E393K	0.85															
47000	ECJ2FB1H473□	1.25	ECJ2VB1E473□	0.85	ECJ2VB1C473□	0.85						ECJ2VF1H473Z	0.6						
56000	ECJ2FB1H563K	1.25	ECJ2VB1E563K	0.85	ECJ2VB1C563K	0.85													
68000	ECJ2FB1H683□	1.25	ECJ2VB1E683□	0.85	ECJ2VB1C683□	0.85						ECJ2VF1H683Z	0.6	ECJ2VF1E683Z	0.6				
82000	ECJ2FB1H823K	1.25	ECJ2VB1E823K	0.85	ECJ2VB1C823K	0.85													
100000	ECJ2FB1H104□	1.25	ECJ2VB1E104□	0.85	ECJ2VB1C104□	0.85						ECJ2VF1H104Z	0.85	ECJ2VF1E104Z	0.6	ECJ2VF1C104Z	0.6		
120000			ECJ2FB1E124K	1.25	ECJ2VB1C124K	0.85					±80 % ±20 % (Z)	ECJ2VF1H154Z	0.85	ECJ2VF1E154Z	0.6	ECJ2VF1C154Z	0.6		
150000			ECJ2FB1E154□	1.25	ECJ2VB1C154□	0.85													
180000			ECJ2FB1E184K	1.25	ECJ2VB1C184K	0.85													
220000			ECJ2FB1E224□	1.25	ECJ2VB1C224□	0.85						ECJ2VF1H224Z	0.85	ECJ2VF1E224Z	0.85	ECJ2VF1C224Z	0.6		
270000					ECJ2FB1C274K	1.25													
330000					ECJ2FB1C334□	1.25								ECJ2FF1E334Z	1.25	ECJ2VF1C334Z	0.85		
390000					ECJ2FB1C394K	1.25													
470000					ECJ2FB1C474□	1.25								ECJ2FF1E474Z	1.25	ECJ2VF1C474Z	0.85		
560000							ECJ2FB1A564K	1.25											
680000							ECJ2FB1A684□	1.25								ECJ2VF1C684Z	0.85		
820000							ECJ2FB1A824K	1.25											
1000000							ECJ2FB1A105□	1.25								ECJ2VF1C105Z	0.85		
1500000										ECJ2FBOJ155□	1.25								
2200000										ECJ2FBOJ225□	1.25				ECJ2FF1C225Z	1.25			
3300000										ECJ2FBOJ335□	1.25								
4700000										under development	1.25							ECJ2FF1A475Z	1.25
10000000										under development	1.25								

* □ : Capacitance Tolerance Code.
 ** Packaging Style Code: "V" or "F" for Taped Version (Taping pitch: 4 mm) and "X" for Bulk Type

Design and specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use.
 Whenever a doubt about safety arises from this product, please contact us immediately for technical consultation.

■ Standard Products for “13” Type (EIA “1206” Type) , Taped Version

Capacitance (pF)	CΔ		SL		
	Capacitance Tolerance	50 VDC		50 VDC	
		Part No.	Dim T (mm)	Part No.	Dim T (mm)
2700		ECJ3VC1H272□	0.6		
3300		ECJ3VC1H332□	0.6	ECJ3VG1H332□	0.6
3900		ECJ3VC1H392□	0.6	ECJ3VG1H392□	0.6
4700	±5 % (J) or ±10 % (K)	ECJ3VC1H472□	0.6	ECJ3VG1H472□	0.6
5600		ECJ3VC1H562□	0.85	ECJ3VG1H562□	0.6
6800		ECJ3VC1H682□	0.85		
8200		ECJ3VC1H822□	1.15		
10000		ECJ3VC1H103□	1.15		

Capacitance (pF)	Capacitance Tolerance	B/X7R						F/Y5V							
		25 VDC		16 VDC		10 VDC		6.3 VDC		25 VDC		16 VDC		10 VDC	
		Part No.	Dim T (mm)	Part No.	Dim T (mm)	Part No.	Dim T (mm)	Part No.	Dim T (mm)	Part No.	Dim T (mm)	Part No.	Dim T (mm)	Part No.	Dim T (mm)
100000		ECJ3VB1E104□	0.85	ECJ3VB1C104□	0.85										
120000		ECJ3VE1E124K	0.85	ECJ3VB1C124K	0.85										
150000		ECJ3VB1E154□	0.85	ECJ3VB1C154□	0.85										
180000		ECJ3VB1E184K	0.85	ECJ3VB1C184K	0.85										
220000		ECJ3VB1E224□	0.85	ECJ3VB1C224□	0.85										
270000		ECJ3VB1E274K	0.85	ECJ3VB1C274K	0.85										
330000		ECJ3VB1E334□	0.85	ECJ3VB1C334□	0.85										
390000		ECJ3FB1E394K	1.15	ECJ3VB1C394K	0.85										
470000	±10 % (K) or ±20 % (M)	ECJ3FB1E474□	1.15	ECJ3VB1C474□	0.85					ECJ3VF1E474Z	0.85				
560000		ECJ3YB1E564K	1.6	ECJ3VB1C564K	0.85										
680000		ECJ3YB1E684□	1.6	ECJ3VB1C684□	0.85					ECJ3FF1E684Z	1.15	ECJ3VF1C684Z	0.85		
820000		ECJ3YB1E824K	1.6	ECJ3FB1C824K	1.15										
1000000		ECJ3YB1E105□	1.6	ECJ3FB1C105□	1.15					ECJ3FF1E105Z	1.15	ECJ3VF1C105Z	0.85		
1500000				ECJ3YB1C155□	1.6	ECJ3YB1A155□	1.6								
2200000				ECJ3YB1C225□	1.6	ECJ3YB1A225□	1.6			ECJ3FF1E225Z	1.15	ECJ3VF1C225Z	0.85		
3300000						ECJ3YB1A335□	1.6								
4700000						under development	1.6	ECJ3YB0J475□	1.6			ECJ3FF1C475Z	1.15		
6800000								ECJ3YB0J685□	1.6						
10000000				under development	1.6	under development	1.6	ECJ3YB0J106□	1.6					ECJ3YF1A106Z	1.6
22000000								under development	1.6						

* □ : Capacitance Tolerance Code.

** : Packaging Style Code: “V”, “F” and “Y” for Taped Version (Taping pitch: 4 mm) and “X” for Bulk Type

■ Standard Products for “23” Type (EIA “3225” Type) , Taped Version

Capacitance (pF)	Capacitance Tolerance	B				F			
		16 VDC		10 VDC		Capacitance Tolerance	25 VDC		
		Part No.	Dim T (mm)	Part No.	Dim T (mm)		Part No.	Dim T (mm)	
4700000	±10 % (K) or ±20 % (M)	ECJ4YB1C475□	2.0			80 %			
10000000		ECJ4YB1C106□	2.0	ECJ4YB1A106□	2.0	-20 % (Z)	ECJ4YF1E106Z	2.0	

* □ : Capacitance Tolerance Code.

** : Packaging Style Code: “Y” for Taped Version (Taping pitch: 4 mm) and “X” for Bulk Type

Design and specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please contact us immediately for technical consultation.

■ Packaging Specifications


● Standard Packing Quantity

Size (EIA)	Style Thickness (mm)	Paper taping		Embossed taping		Bulk	Bulk case
		pitch (mm)	Quantity (pcs./reel)	pitch (mm)	Quantity (pcs./reel)	Quantity (pcs./bag)	Quantity (pcs./case)
06(0201)	0.3	2	15,000	—	—	1,000	—
10(0402)	0.5	2	10,000 (20,000)	—	—	1,000	50,000
11(0603)	0.42	4	5,000	—	—	1,000	—
	0.8	4	4,000 (10,000)	—	—	1,000	15,000
12(0805)	0.6	4	5,000 (20,000)	—	—	1,000	10,000
	0.85	4	4,000 (10,000)	—	—	1,000	—
13(1206)	1.25	—	—	4	3,000	1,000	—
	0.6	4	5,000 (20,000)	—	—	1,000	—
	0.85	4	4,000 (10,000)	—	—	1,000	—
	1.15	—	—	4	3,000	1,000	—
23(1210)	1.6	—	—	4	2,000	1,000	—
	2.0	—	—	4	2,000	1,000	—

() for large size reel applied


● Paper Taping

P₁: 2mm

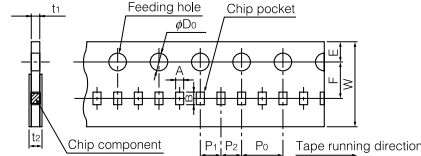


Symbol Size Code	A	B	W	F	E	P ₁	P ₂	P ₀	φD ₀	T ₁	T ₂
06 (0201)	0.37 ±0.03	0.67 ±0.03								0.5 max.	0.8 max.
10 (0402)	0.65 ±0.05	1.15 ±0.05	8.0 ±0.2	3.50 ±0.05	1.75 ±0.10	2.00 ±0.05	2.00 ±0.05	4.0 ±0.1	1.5 ±0.1	0.7 max.	1.0 max.
11 (0603)	1.10 ±0.10	1.90 ±0.10								1.1 max.	1.4 max.
12 (0805)	1.65 ±0.20	2.4 ±0.2									

P₁: 4mm

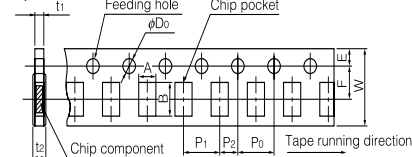


Symbol Size Code	A	B	W	F	E	P ₁	P ₂	P ₀	φD ₀	T ₁	T ₂
11 (0603)	1.10 ±0.10	1.90 ±0.10									
12 (0805)	1.65 ±0.20	2.4 ±0.2	8.0 ±0.2	3.50 ±0.05	1.75 ±0.10	4.0 ±0.1	2.00 ±0.05	4.0 ±0.1	1.5 ±0.1	1.1 max.	1.4 max.
13 (1206)	2.0 ±0.2	3.6 ±0.2									

● Embossed Taping

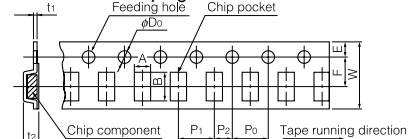

Symbol Size Code	A	B	W	F	E	P ₁	P ₂	P ₀	φD ₀	T ₁	T ₂
12 (0805)	1.55 ±0.20	2.35 ±0.20									
13 (1206)	1.95 ±0.20	3.6 ±0.2	8.0 ±0.2	3.50 ±0.05	1.75 ±0.10	4.0 ±0.1	2.00 ±0.05	4.0 ±0.1	1.5 ±0.1	0.6 max.	2.1 max.
23 (1210)	2.9 ±0.2	3.6 ±0.2									2.5 max.


● Reel for Taping




A	B	C	D	E	W	W ₁
φ180 ^{+0.3} (330±5)	φ60.0±0.5 (50 min.)	13.0±0.5	21.0±0.5 (20 min.)	2.0±0.5	9.0±0.3 (9.5±1.0)	1.3±0.2 (2.0±0.5)

() : Large size reel

● Leader Part and Taped End




● Leader part



Unit : mm

● Bulk Case




Unit : mm


Typical Characteristics

Temperature characteristics


Class 1 (T.C. Type)

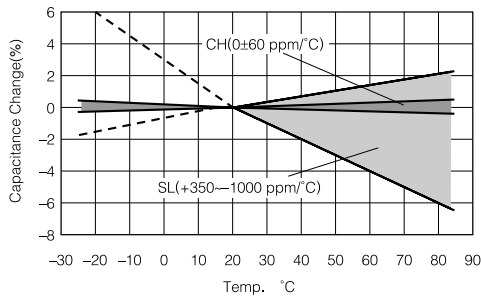


Class 2 (Hi-K Type)

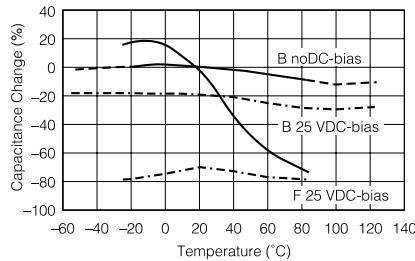


Capacitance -DCbias Voltage

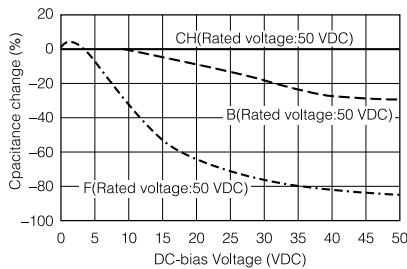

Capacitance -ACbias Voltage

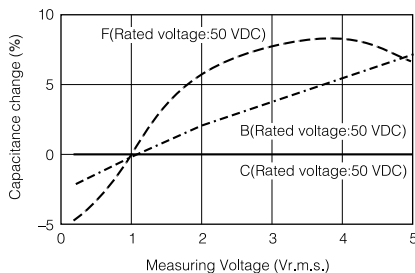

Capacitance aging

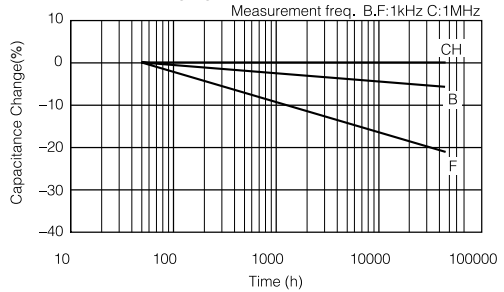

Impedance-Frequency

